




Technical Details	
• CNC control system	Fanuc Oi-TF plus
• Total axes	7
• Capacity coolant tank	153 liter
• Dimensions (WxDxH)	1861 x 1060 x 1750
• Weight	1700kg
• Power consumption	3.0kVA
• Rapide traverse speed	35m/min (X1, Y1, Z1, X2, Z2)

## Advantages & Features

The **SB-16 III** sliding headstock automatic lathe is particularly suitable as an entry-level automatic lathe. It offers everything for a solid basic configuration at a very interesting price - making it an attractive basic machine. The main focus of this series was on a fast return-on-investment.

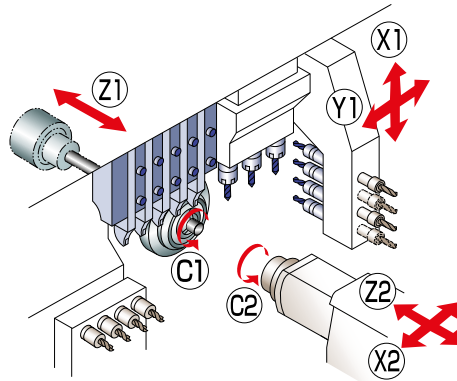

FRONT SIDE	
Number of axes	4
Main spindle	Z1 / C1 axis
Tool post	X1 / Y1 axis
max. Machining diameter	16mm
max. Headstock stroke	155mm
Drive power	2.2kW
max. Speed	10'000 1/min

### TOOL GANG TOOL POST

Turning tools	6x □10mm
Drilling tools	4x (ER16)
Cross working tools	1x (ER16)/2x(ER11)
max. Speed	7'500 1/min

BACK SIDE	
Number of axes	3
Sub spindle	Z1 / C1 / C2 axis
max. Gripping diameter	16mm
Drive power	1.1kW
max. Speed	9'000 1/min.

### BACKWORKING TOOLS

Number of tools	4x (ER16) fix
-----------------	---------------